



## TABULKA NOSNOTÍ ŘETEZOVÝCH VAZÁKŮ tř.10



Způsob vázání

Přímý

Přímý

Přímý

Na smyčku


Na smyčku

Opásáním

Opásáním

Věncové

Úhel sklonu	0°	$\beta \leq 45^\circ$	$\beta \leq 60^\circ$	$\beta \leq 45^\circ$	$\beta \leq 60^\circ$	0°	$\beta \leq 45^\circ$	$\beta \leq 60^\circ$	$0^\circ \leq \beta \leq 45^\circ$	$0^\circ \leq \beta \leq 45^\circ$	0°
Zátěžový faktor	1	1,4	1	2,1	1,5	0,8	1,12	0,8	1,4	2,1	1,6
Ø Řetězu	Nosnost (kg)										
6	1400	2000	1400	3000	2120	1120	1600	1120	2000	3000	2240
7	1900	2650	1900	4000	2800	1500	2120	1500	2650	4000	3000
8	2500	3550	2500	5300	3750	2000	2800	2000	3550	5300	4000
10	4000	5600	4000	8000	6000	3150	4250	3150	5600	8000	6300
13	6700	9500	6700	14000	10000	5300	7500	5300	9500	14000	10600
16	10000	14000	10000	21200	15000	8000	11200	8000	14000	21200	16000
20	16000	22400	16000	33600	24000	12800	17920	12800	22400	33600	25600
22	19000	26500	19000	40000	28000	15000	21200	15000	26500	40000	30000
26	26500	37100	26500	55650	39750	21200	29680	21200	37100	55650	42400

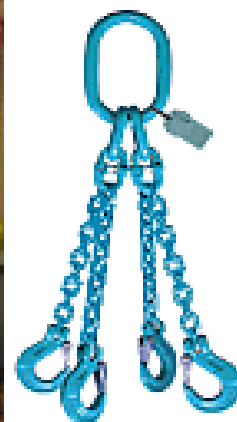

**GANAS** spol.s r. o.

Areál Svit budova č. 57  
762 02 Zlín

E-shop: [www.vazaky.com](http://www.vazaky.com)

e-mail: [info@vazaky.com](mailto:info@vazaky.com)  
[www.ganas-jeraby.cz](http://www.ganas-jeraby.cz)



**737 540 392**

577 522 512  
577 523 136



